



5151 REPLACEMENT HARNESS

FITTING INSTRUCTIONS



HELMET COMPLETE WITH NEW HARNESS



5151 REPLACEMENT HARNESS FITTING INSTRUCTIONS



Warning: Failure To Replace The Harness Correctly Will Compromise The Performance Of The Helmet



JSP Ltd, Worsham Mill, Minster Lovell Oxfordshire, OX29 0TA
TECHNICAL HELPLINE: +44(0)1993 826051
Email: technical.service@jsp.co.uk



5151 REPLACEMENT HARNESS


FITTING INSTRUCTIONS



REMOVING THE HARNESS



STEP 1: Locate the 6 clips that are connected to the helmet shell. To remove the clips grasp the bottom of the clip and push upwards.

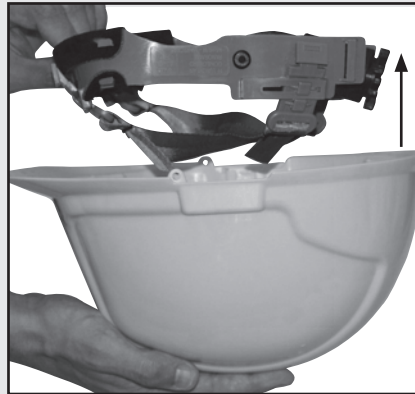


STEP 2: Remove the harness from the helmets shell.

FITTING A NEW HARNESS



STEP 1: Make sure the new harness has three webbing straps, two of which should be connected to the head piece.

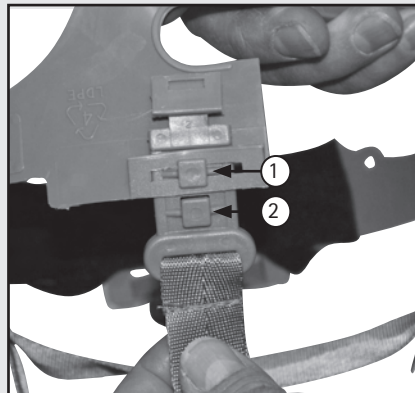

STEP 2: The harness can be adjusted by changing which of the two tabs on the webbing strap goes through the slit on the harness. This allows you to achieve a comfortable and secure fit.




5151 REPLACEMENT HARNESS


FITTING INSTRUCTIONS




STEP 3: Place the harness into the helmets shell, making sure the sweatband is at the peak and wheel ratchet is at the rear.

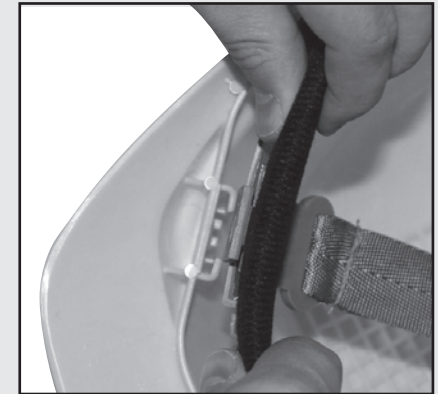

STEP 4: Align the clips on the harness with the slots on the inner rim of the helmets shell.

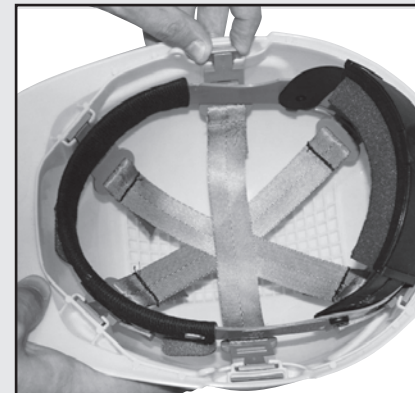

STEP 5: Place the remaining webbing strap horizontally across the middle of the helmet tucking the clips in between the shell and the harness.

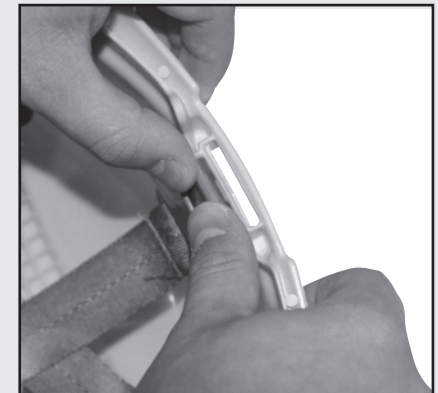

STEP 6: Push the 6 clips downwards into the slots in the helmets shell to secure the harness to the helmet.

Completed Harness On Rear →